

**CERTIFICATE**



I, the undersigned, Takashi KISO, residing at 5th Floor, Shintoshicenter Bldg., 24-1, Tsurumaki 1-chome, Tama-shi, Tokyo 206-0034 Japan, hereby certify that to the best of my knowledge and belief the following is a true translation into English made by me of Japanese Patent Application No. JP 11-213808 filed on July 28, 1999.

Dated this 19<sup>th</sup> day of December, 2003

**RECEIVED**

JAN 13 2004

Technology Center 2600

*Takashi Kiso*

Takashi KISO

Reference Number = 2905415003

Application Number HEI 11-213808

---

[Name of Document]

PATENT APPLICATION

[Reference Number]

2905415003

[Filing Date]

July 28, 1999

[To]

Commissioner, Patent Office

[International Patent Classification]

H04N 7/32

[Inventor]

[Address or Residence]

4-3-1, Tsunashimahigashi, Kohoku-ku,  
Yokohama-shi, Kanagawa  
Matsushita Communication Industrial Co., Ltd.  
Koji IMURA

[Name]

[Applicant for Patent]

[Identification Number]

000005821

[Name]

MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.

[Agent]

[Identification Number]

100105050

[Patent Attorney]

[Name]

Kimihito WASHIDA

[Indication of Official Fee]

[Prepayment Register Number]

041243

[Amount of Payment]

¥ 21,000

[List of Items Submitted]

[Name of Item]

Specification 1

[Name of Item]

Drawing 1

[Name of Item]

Abstract 1


[Number of General Power of Attorney]

9700376


[NAME OF DOCUMENT]

DRAWINGS


[FIG. 1]

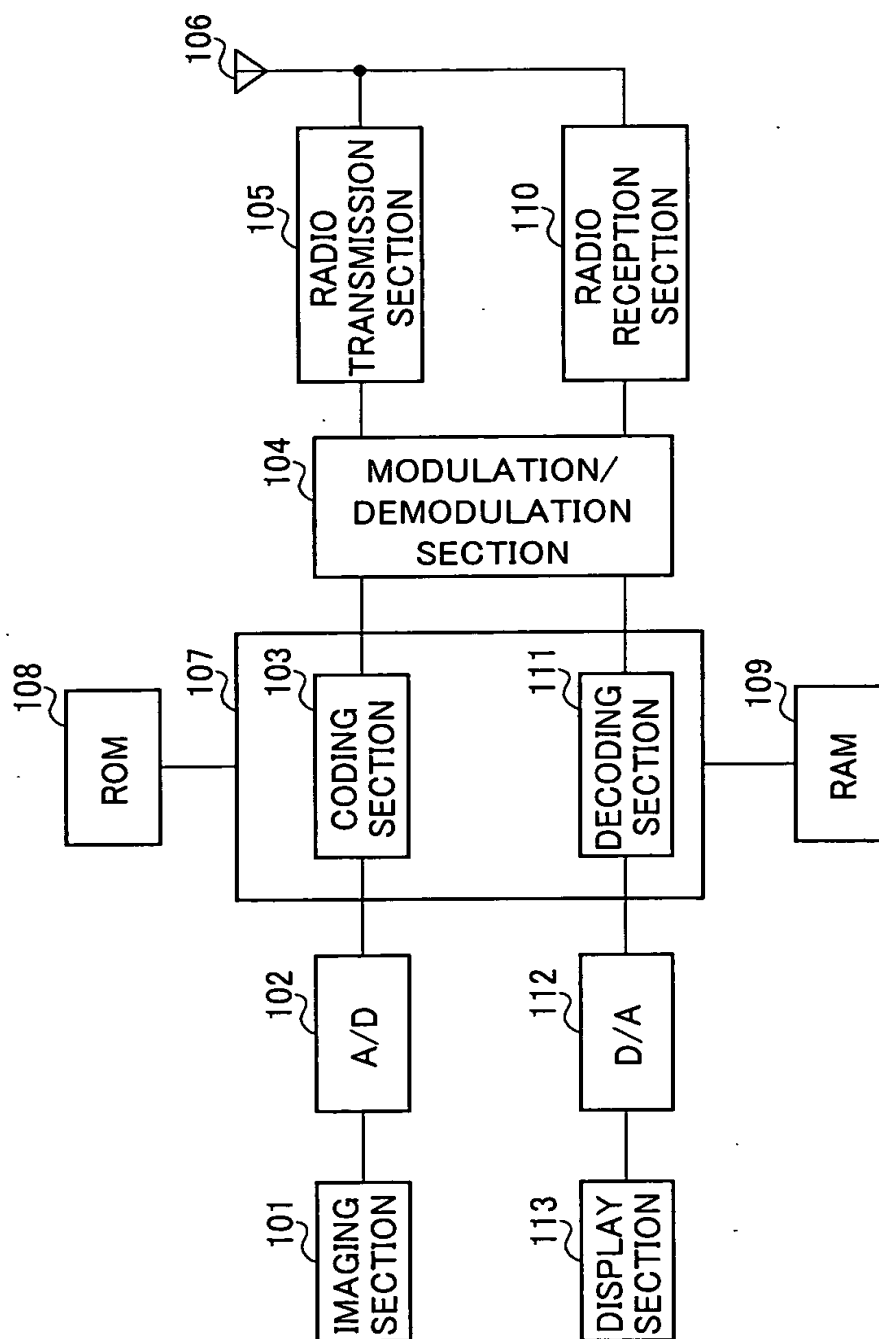


[FIG. 2]

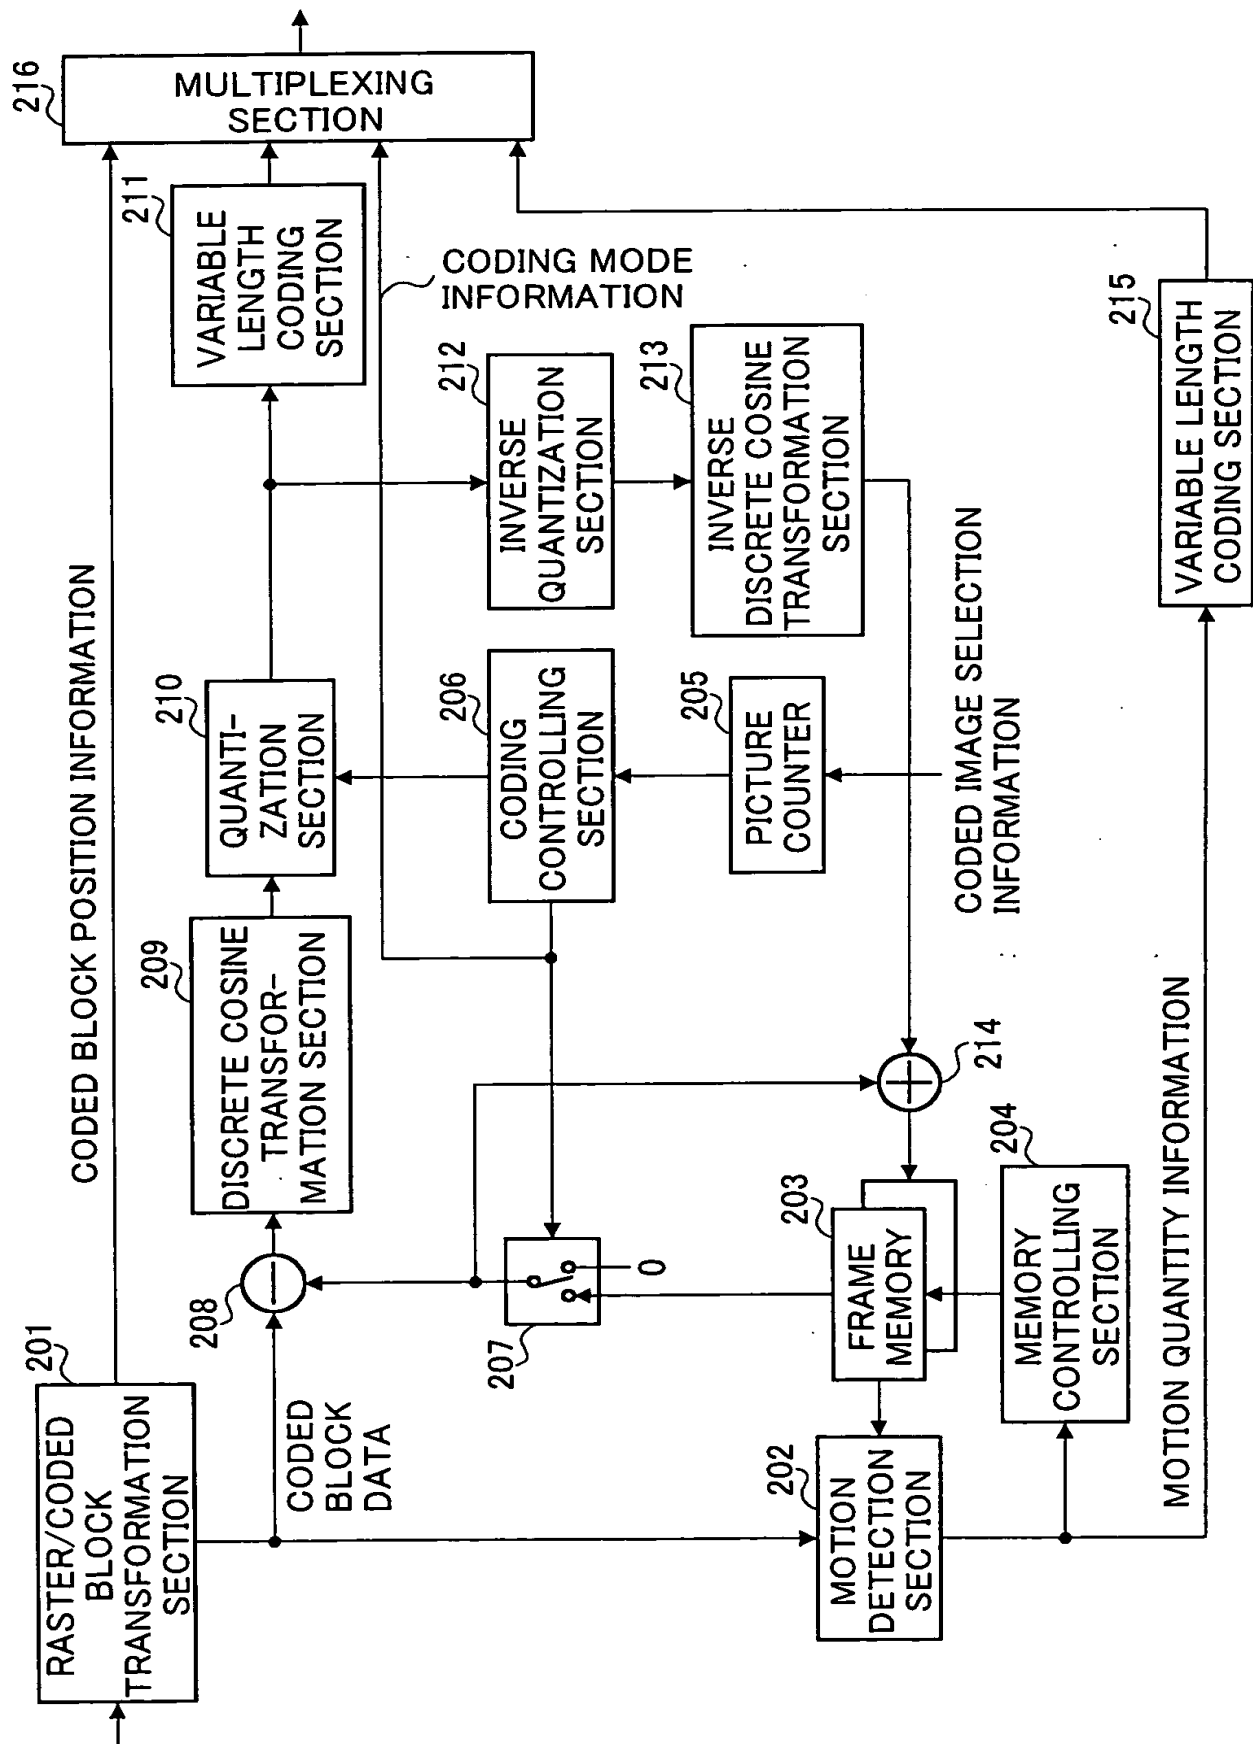

[FIG. 3]

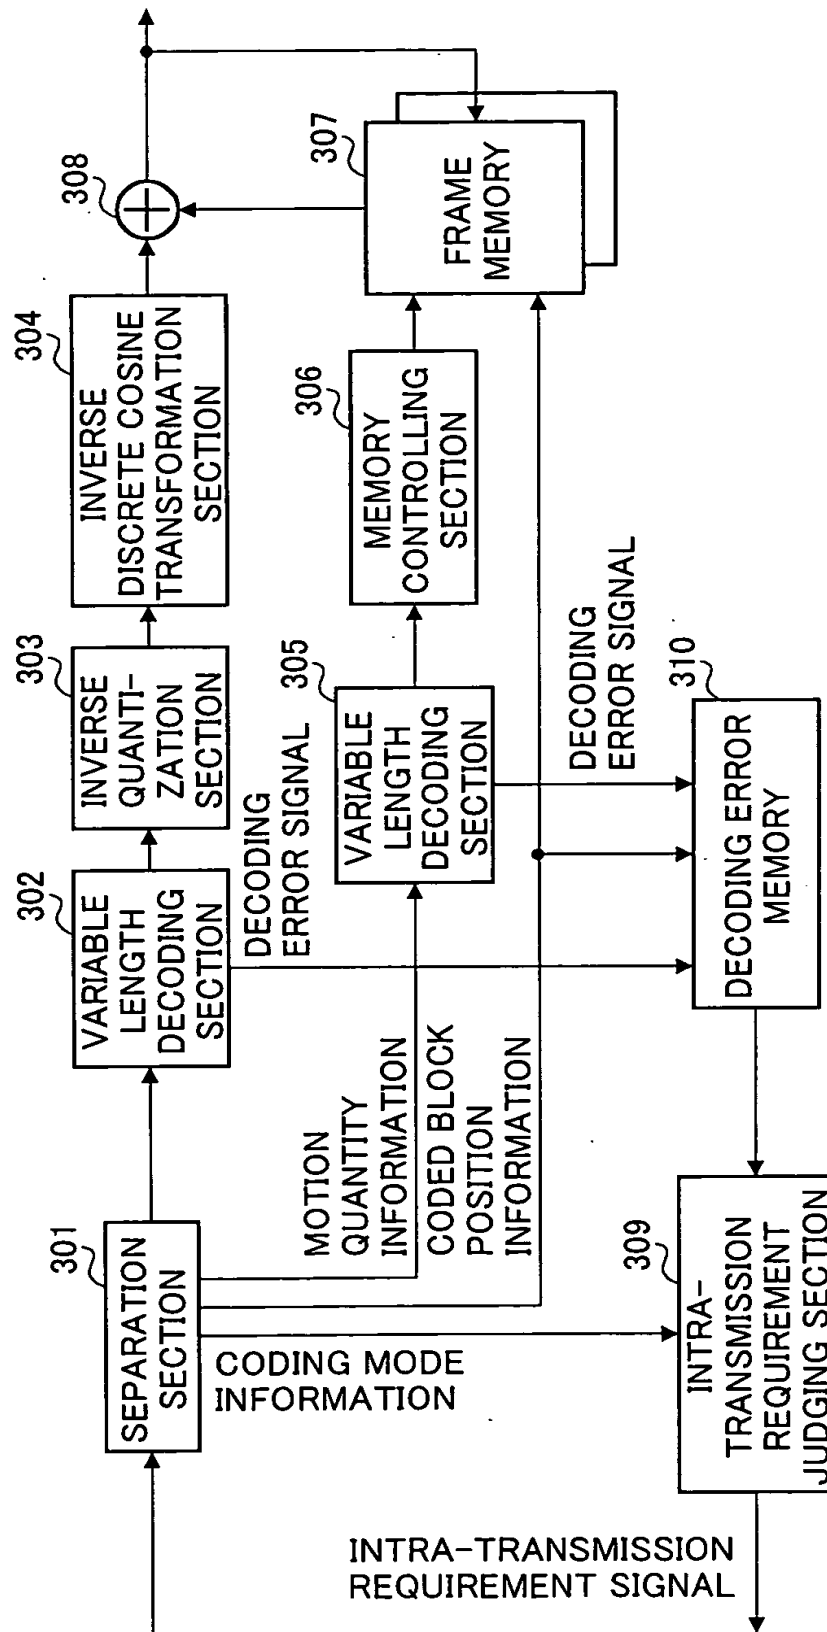

[FIG. 4]

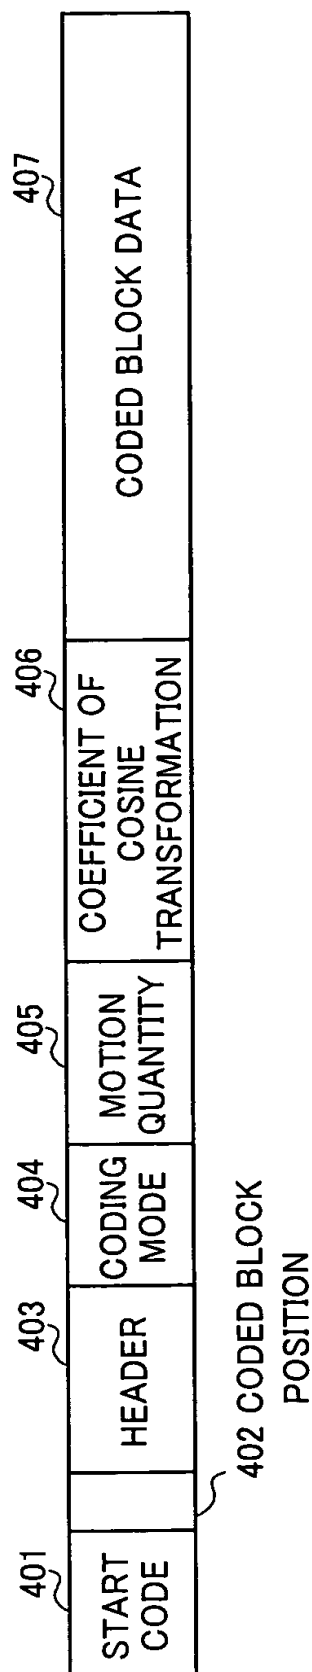

[NAME OF DOCUMENT] SPECIFICATION

[TITLE OF THE INVENTION] CODING APPARATUS AND CODING  
METHOD OF TIME-VARYING IMAGE SIGNAL

[WHAT IS CLAIMED IS:]

5 [Claim 1] A coding apparatus of a time-varying image signal, said apparatus comprising: intra-coding means for performing intra-coding in which coded block formed by division of a time-varying image signal to a plurality of blocks are coded as they are; and coding controlling means for performing control of coding so that successive intra-coding of N pictures are performed from a  
10 beginning of communication.

[Claim 2] The coding apparatus of a time-varying image signal according to claim 1, wherein said coding controlling means makes picture qualities of (N - 1) pictures from the beginning of communication relatively rough and makes a picture quality of a Nth picture from the beginning of the communication  
15 relatively fine.

[Claim 3] A base station apparatus comprising a coding apparatus of a time-varying image signal according to claim 1 or 2.

[Claim 4] A communication terminal apparatus comprising a coding apparatus of a time-varying image signal according to claim 1 or 2.

20 [Claim 5] A decoding apparatus of a time-varying image signal, said apparatus comprising: decoding means for decoding an image-coded data; memorizing means for memorizing position information of a coded block in a time-varying image signal, the coded block corresponding to an image-coded data that could not correctly be decoded owing to a transmission error, in a case  
25 where said image-coded data is an image-coded data after performing of intra-coding thereof; and requiring means for ascertaining whether a coded block that could not correctly be decoded even once exists in said memorizing means or not when a first image-coded data after performing of motion compensation prediction coding thereof from a beginning of communication is received, and

for requiring transmission of a picture after performing of intra-coding thereof when existence of the coded block, which has not been decoded correctly, is ascertained.

[Claim 6] The decoding apparatus of a time-varying image signal according to claim 5, wherein said decoding means does not perform decoding of the image-coded data after performing of the motion compensation prediction coding thereof in a case where the coded block that could not correctly be coded even once exists in said memorizing means when the first image-coded data after performing of the motion compensation prediction coding from the beginning of the communication is received.

[Claim 7] A base station apparatus comprising a coding apparatus of a time-varying image signal according to claim 5 or 6.

[Claim 8] A communication terminal apparatus comprising a coding apparatus of a time-varying image signal according to claim 5 or 6.

[Claim 9] A coding method of a time-varying image signal, said coding method comprising: an intra-coding step for performing intra-coding in which coded blocks formed by division of a time-varying image signal to a plurality of blocks are coded as they are; and a coding controlling step for performing control of coding so that successive intra-coding of N pictures is performed from a beginning of communication, and for making picture qualities of (N - 1) pictures from the beginning of the communication relatively rough, and further for making a quality of a Nth picture from the beginning of the communication relatively fine.

[Claim 10] A decoding method of a time-varying image signal, said method comprising: a decoding step for decoding an image-coded data; a memorizing step for memorizing position information of a coded block in a time-varying image signal, the coded block corresponding to an image-coded data that could not correctly be decoded owing to a transmission error, in a case where said image-coded data is an image-coded data after performing of intra-coding



thereof; and a requiring step for ascertaining whether a coded block that could not correctly be decoded even once exists or not when a first image-coded data after performing of motion compensation prediction coding thereof from a beginning of communication is received, and for requiring transmission of a picture after performing of intra-coding thereof when existence of the coded block, which has not been decoded correctly, is ascertained.

[Claim 11] The decoding method of a time-varying image signal according to claim 10, wherein in said decoding step, decoding of the image-coded data after performing of the motion compensation prediction coding thereof is not performed in a case where the coded block that could not correctly be coded even once exists when the first image-coded data after performing of the motion compensation prediction coding from the beginning of the communication is received.

#### [DETAILED DESCRIPTION OF THE INVENTION]

15       【 0 0 0 1 】

#### [TECHNICAL FIELD OF THE INVENTION]

The present invention relates to a coding apparatus and a coding method of digital time-varying image signals for the use of a visual telephone, a video conference, and the like, and more particularly to a coding apparatus and a coding method of digital time-varying image signals in image communication on transmission lines on which transmission errors are generated.

20       【 0 0 0 2 】

#### [PRIOR ART]

As a conventional coding method of digital time-varying image signals, there can be cited the coding method in ITU-T (International Telecommunication Union - Telecommunication Standardization Sector) Recommendation H.261 that was recommended in March, 1993. The featured coding method of H.261 is a motion compensation prediction system. The motion compensation prediction system is concretely performed as follows.

【 0 0 0 3 】

First, an input image picture and a pre-coded picture are compared, and a motion quantity between them is measured (motion detection). An input image picture is predicted on the basis of the motion quantity and the pre-coded picture.

- 5 The difference between the predicted image (prediction image) and the input image picture (prediction error signal) is calculated, and the prediction error signals and the aforesaid motion quantity are transmitted to a reception side. Thereby, image information can be transmitted in a small data quantity.

【 0 0 0 4 】

- 10 Moreover, in H.261, there is another method different from the motion compensation picture prediction system. The method does not use the difference between the prediction image and the input image picture, but the method codes the input image picture itself. The method is called as "intra-coding mode". The intra-coding mode is used in a case where any pre-coded pictures exist such as
- 15 the beginning of communication although the generated data quantity is larger than that in the motion compensation prediction system, and in a case where the correlation between an input image picture and a pre-coded picture is low and the data quantity is larger than that in the motion compensation prediction system.

20 【 0 0 0 5 】

- Moreover, in the case where an transmission error is generated on the transmission lines and a section of images deteriorated, because the deterioration of the picture quality is propagated to the next picture in turn in the motion compensation prediction system in which only the prediction error signal is
- 25 transmitted, the deterioration of the picture quality can be recovered by the adoption of the intra-coding.

【 0 0 0 6 】

A picture is divided into blocks (coded blocks), each having  $16 \times 16$  pixels in both of the motion compensation prediction system and the intra-coding mode,

and both the systems are applied at every coded block. A picture in which all of the coded blocks in it are forcedly intra-coded is called as "intra-picture", and a picture coded in conformity with the motion compensation prediction system is called as "inter-picture".

5       【 0 0 0 7 】

On the other hand, there is a concealing processing technique as a technique for suppressing the deterioration of the picture quality when a transmission error occurs during transmission. The concealing processing technique is the processing to do voluntarily on the side of the reception, and is not included in  
10 the contents which are prescribed by the recommendation. However, by performing the processing, the picture quality deterioration in case of the occurrence of the transmission error can be suppressed. As one of the concealing processing techniques, there is a method in which when a transmission error occurred and received coded block data can not be decoded correctly, coded  
15 block data existing at the same position in the pre-coded picture is output as it is.

      【 0 0 0 8 】

Moreover, as one of the concealing processing techniques, there is a method in which a motion quantity of a coded block that could correctly be decoded and exists at a peripheral position is adopted as the motion quantity of the present  
20 coded block and a prediction image is generated from a pre-coded picture by the use of the adopted motion quantity and the generated prediction image is output.

      【 0 0 0 9 】

#### [PROBLEMS TO BE SOLVED BY THE INVENTION]

When image communication begins, generally, an intra-picture is used as the  
25 first picture. This is because a pre-coded picture that becomes always necessary in case of motion compensation prediction coding does not exist at this time.

      【 0 0 1 0 】

When a transmission error occurs during the transmission of the first picture, a coding block of a section of the first picture becomes impossible to be decoded

correctly. In this case, because any pre-coded picture does not exist, it is impossible to do the concealing processing using a section of the pre-coded picture. Accordingly, the concealing processing of the section of the first picture cannot help performing by means of a beforehand prescribed value.

5           【 0 0 1 1 】

As described above, the picture quality when a transmission error occurred in the first picture deteriorates more remarkably than the picture quality when concealing processing is performed in the case where a pre-coded picture exists. Moreover, because the motion compensation prediction system is used, there is a  
10 problem that the deterioration of the picture quality in the first picture is propagated in the second picture and pictures after it with the elapse of time.

          【 0 0 1 2 】

The present invention is carried out in view of the foregoing, and the object of the present invention is to provide a coding apparatus and a coding method of a  
15 time-varying image signal, both capable of suppressing the remarkable picture quality deterioration at the time of the beginning of communication.

          【 0 0 1 3 】

#### [MEANS FOR SOLVING THE PROBLEMS]

To solve the abovementioned problems, the following steps are taken in the  
20 present invention.

The present invention has a configuration comprising an intra-coding means for performing the intra-coding in which coded blocks formed by the division of a time-varying image signal to a plurality of blocks are coded as they are, and a coding controlling means for performing the control of coding so that the  
25 successive intra-coding of N pictures are performed from the beginning of communication.

          【 0 0 1 4 】

According to the configuration, the probability that a coded block at the same position becomes impossible to be correctly decoded even once can be decreased

by the successive transmission of an intra-picture (N - 1) times, and the propagation of the deterioration of picture quality is obviated. Consequently, even if a transmission error is generated in the first picture and a coded block that could not correctly be decoded exists, because the next picture is transmitted  
5 after the intra-coding thereof, it becomes possible to recover the coded block from being deteriorated in its picture quality unless the coded block at the same position in the next picture can correctly be decoded owing to a transmission error.

【 0 0 1 5 】

10 The present invention has a configuration in which the coding controlling means makes the picture qualities of (N - 1) pictures from the beginning of communication relatively rough and makes the picture quality of the Nth picture from the beginning of the communication relatively fine.

【 0 0 1 6 】

15 According to the configuration, a code quantity can be suppressed to be small, and transmission time can be shortened. Thereby, the probability of the occurrence of a transmission error in a picture can be decreased.

【 0 0 1 7 】

Moreover, the present invention provides a base station apparatus comprising  
20 the above coding apparatus of the time-varying signal, and provides a communication terminal apparatus comprising the above coding apparatus of the time-varying signal.

【 0 0 1 8 】

The present invention comprises: decoding means for decoding an image-  
25 coded data; memorizing means for memorizing position information of a coded block in a time-varying image signal, the coded block corresponding to an image-coded data that could not correctly be decoded owing to a transmission error, in a case where said image-coded data is an image-coded data after performing of intra-coding thereof; and requiring means for ascertaining

whether a coded block that could not correctly be decoded even once exists in said memorizing means or not when a first image-coded data after performing of motion compensation prediction coding thereof from a beginning of communication is received, and for requiring transmission of a picture after performing of intra-coding thereof when existence of the coded block, which has not been decoded correctly, is ascertained.

【 0 0 1 9 】

According to the configuration, an intra-picture which does not have the coding block which could not correctly be decoded in conformity with the intra-coding mode even once can be obtained, and the time-wise propagation of the remarkable deterioration of image quality can be obviated.

【 0 0 2 0 】

The present invention has a constitution in which the decoding means does not perform decoding of the image-coded data after performing of the motion compensation prediction coding thereof in a case where the coded block that could not correctly be coded even once exists in the memorizing means when the first image-coded data after performing of the motion compensation prediction coding from the beginning of the communication.

【 0 0 2 1 】

According to the configuration, the reference to the coded block which could not correctly be decoded even once in conformity with the intra-coding mode by an inter-picture is obviated, and thereby the time-wise propagation of the remarkable deterioration of a picture quality can be avoided.

【 0 0 2 2 】

Moreover, the present invention provides a base station apparatus comprising the above decoding apparatus of the time-varying signal, and provides a communication terminal apparatus comprising the above decoding apparatus of the time-varying signal.

【 0 0 2 3 】

The present invention comprises: an intra-coding step for performing intra-coding in which coded blocks formed by division of a time-varying image signal to a plurality of blocks are coded as they are; and a coding controlling step for performing control of coding so that successive intra-coding of N pictures is performed from a beginning of communication, and for making picture qualities of (N - 1) pictures from the beginning of the communication relatively rough, and further for making a quality of a Nth picture from the beginning of the communication relatively fine.

【 0 0 2 4 】

According to the method, the probability that a coded block at the same position becomes impossible to be correctly decoded even once can be decreased, and the propagation of the deterioration of picture quality is prevented, by transmitting an intra-picture (N - 1) times successively. Consequently, even if a transmission error is generated in the first picture and a coded block that could not correctly be decoded exists, because the next picture is transmitted after the intra-coding thereof, it becomes possible to recover the coded block from being deteriorated in its picture quality unless the coded block at the same position in the next picture can correctly be decoded owing to a transmission error.

【 0 0 2 5 】

The present invention comprises: a decoding step for decoding an image-coded data; a memorizing step for memorizing position information of a coded block in a time-varying image signal, the coded block corresponding to an image-coded data that could not correctly be decoded owing to a transmission error, in a case where the image-coded data is an image-coded data after performing of intra-coding thereof; and a requiring step for ascertaining whether a coded block that could not correctly be decoded even once exists or not when a first image-coded data after performing of motion compensation prediction coding thereof from a beginning of communication is received, and for requiring transmission of a picture after performing of intra-coding thereof when existence

of the coded block, which has not been decoded correctly, is ascertained.

【 0 0 2 6 】

According to the method, an intra-picture having no coded block that could not correctly be decoded even once in conformity with the intra-coding mode can  
5 be obtained, and thereby the time-wise propagation of the remarkable deterioration of picture quality can be avoided.

【 0 0 2 7 】

The present invention, wherein in said decoding step, decoding of the image-coded data after performing of the motion compensation prediction coding  
10 thereof is not performed in a case where the coded block that could not correctly be coded even once exists when the first image-coded data after performing of the motion compensation prediction coding from the beginning of the communication is received.

【 0 0 2 8 】

15 According to the method, the reference to the coded block which could not correctly be decoded even once in conformity with the intra-coding mode by an inter-picture is obviated, and thereby the time-wise propagation of the remarkable deterioration of picture quality can be avoided.

【 0 0 2 9 】

20 [DESCRIPTION OF THE SPECIAL EMBODIMENTS]

The essence of the present invention is that a plurality of pictures are continuously coded in conformity with the intra-coding mode (N times) from the beginning of communication, and that the first (N - 1) pictures are transmitted in rough picture qualities and the last Nth picture is transmitted in a fine picture  
25 quality.

【 0 0 3 0 】

With reference now to the attached drawings, embodiments of the present invention will be explained in detail below.

(Embodiment 1)



FIG 1 is a block diagram showing the configuration of a radio communication apparatus equipped with a coding apparatus according to embodiment 1 of the present invention. Here, the “radio communication apparatus” refers to a base station apparatus or a communication terminal such as a mobile station, etc in a digital radio communication system. Moreover, the radio communication apparatus may be a portable terminal and may be configured in a form to be used in a state of being connected with a computer.

【 0 0 3 1 】

In the radio communication apparatus, an image is taken in by an imaging section 101 such as a camera on the transmission side, and is output to an A/D transformer 102 as an image signal. In the A/D transformer 102, the image signal is transformed to a digital sound signal, and is output to a coding section 103. The coding section 103 performs the image-coding processing of the digital sound signal, and outputs coded information to a modulation/demodulation section 104. The modulation/demodulation section 104 digitally modulates the coded image signal, and transmits the digitally modulated image signal to a radio transmission circuit 105. The radio transmission circuit 105 performs the prescribed radio transmission processing of the modulated signal. This signal is sent via antenna 106. Incidentally, a processor 107 performs its processing by using the data stored in a RAM 109 and a ROM 108 appropriately.

【 0 0 3 2 】

On the other hand, on the reception side of the radio communication apparatus, the prescribed radio reception processing of a signal received by the antenna 106 is performed by a radio reception circuit 110, and the processed signal is transmitted to the modulation/demodulation section 104. The modulation/demodulation section 104 performs the demodulation processing of the received signal, and outputs the demodulated signal to the decoding section 111. The decoding section 111 performs the decoding processing of the demodulated signal to obtain a digital decoded signal, and outputs the digital

decoded signal to a D/A transformer 112. The D/A transformer 112 transforms the digital decoded signal output from the decoding section 111 to an analog decoded signal, and outputs the analog decoded signal to a display section 113 such as a display. Finally, the display section 113 displays the image.

5           【 0 0 3 3 】

Here, the coding section 103 and the decoding section 111 is operated by the processor 107 such as a digital signal processor (DSP) by the use of memories stored in the RAM 109 and the ROM 108. Moreover, the programs for these operations are stored in the ROM 108.

10           【 0 0 3 4 】

FIG 2 is a block diagram showing the configuration of the coding apparatus of the present invention which is applied to the coding section in the radio communication apparatus shown in FIG 1.

In FIG 2, a raster/coded block transformation section 201 transforms obtained  
15 image data to a raster/coded block. The position information of the raster/coded block transformed by the raster/coded block transformation section 201 is transmitted to a multiplexing section 216. Moreover, the data of the raster/coded block (the present picture) is transmitted to a motion detection section 202.

          【 0 0 3 5 】

20       The motion detection section 202 detects the motion of the image on the basis of the difference between a previous picture and the present picture. In this case, the previous picture is output from a frame memory 203. memory controlling section 204 controls the output of the reproduced image memorized in the frame memory 203 on the basis of the motion quantity information from the motion  
25 detection section 202. Incidentally, the motion quantity information is transmitted to a variable length coding section 215, and is transformed to a Huffman code there to be transmitted to the multiplexing section 216.

          【 0 0 3 6 】

A picture counter 205 counts the number of pictures. The counted value of

the picture counter 205 is transmitted to a coding controlling section 206. The coding controlling section 206 judges whether the coding method of input time-varying image signal is the intra-coding mode or the motion compensation prediction system mode, and then the coding controlling section 206 outputs the  
 5 judged coding mode to a switch 207. And the coding controlling section 206 controls a quantization parameter in conformity with the coding mode. This quantization parameter is transmitted to a quantization section 210. Incidentally, the coding mode information is transmitted to the multiplexing section 216.

#### 【 0 0 3 7 】

10 The coded block data is compared with the previous picture stored in the frame memory 203 by a subtracter 208 in case of the motion compensation prediction system mode, and the difference is transmitted to a discrete cosine transformation section (DCT) 209. Incidentally, in case of the intra-coding mode, the coded block data is transmitted to the discrete cosine transformation section  
 15 209.

#### 【 0 0 3 8 】

The data that has received the discrete cosine transformation is transmitted to quantization section 210, and is quantized on the basis of the quantization parameter transmitted from the coding controlling section 206. The quantized  
 20 data of the DCT coefficient is transmitted to a variable length coding section 211, and is transmitted to an inverse quantization section 212. The variable length coding section 211 transforms the quantized data of the DCT coefficient into a Huffman code, and transmits the Huffman code to the multiplexing section 216.

#### 【 0 0 3 9 】

25 The quantized data of the DCT coefficient transmitted to the inverse quantization section 212 is inversely quantized and becomes a DCT coefficient to be transmitted to an inverse discrete cosine transformation section 213. The inverse discrete cosine transformation section 213 performs the inverse discrete cosine transformation by the use of the DCT coefficient to obtain coded block

data corresponding to the difference between the previous picture and the current picture.

【 0 0 4 0 】

An adder 214 obtains the present picture by adding the coded block data and the previous picture, that is, by updating the previous picture in its moved parts. The obtained present picture is transmitted to the frame memory 203 and is stored therein.

【 0 0 4 1 】

The multiplexing section 216 multiplexes the DCT coefficient, the motion quantity information, the position information of the coded block, and the coded mode to obtain multiplexed data. The multiplexed data is transmitted.

【 0 0 4 2 】

Next, the operations of the coding apparatus having the aforesaid configuration will be described.

An input image is divided into coded blocks in a size of, for example,  $16 \times 16$  pixels in the raster/coded block transformation section 201 to be output therefrom. Next, the divided coded block data is transmitted to the motion detection section 202, and is compared with a previous picture in the frame memory 203 therein. Then, the motion quantity of the present coded block (the difference between the previous picture and the present picture) is obtained. The motion quantity information is transmitted to the variable length coding section 215, and is transformed to a Huffman code therein to be transmitted to the multiplexing section 216.

【 0 0 4 3 】

A picture counter 205 counts and outputs the number of pictures input from the beginning of communication. The information of the image which was beforehand selected (the coding image choice information) by a (not shown) processing section for selecting an image to be coded is input into the picture counter 205. The picture counter 205 increases its counting value at every

inputting of the image information. Moreover, the picture counter 205 is configured so that the picture counter 205 is automatically reset when the power source of the apparatus is turned on or at the initial time of image transmission.

【 0 0 4 4 】

5       The switch 207 switches the output of the picture from the frame memory 203 on the basis of the information of the coding mode of the coding controlling section 206. To put it concretely, in case of the intra-coding mode, the switch 207 is switched to the side of "0". And, in case of the motion compensation prediction system, the switch 207 is switched to the frame memory 203 to make  
10   the frame memory 203 output the data of the previous picture to the subtracter 208.

【 0 0 4 5 】

      The subtracter 208 obtains the difference between the previous picture and the present coded block data to output the obtained difference value to the  
15   discrete cosine transformation section 209. In the discrete cosine transformation section 209, the difference value is changed into a frequency domain, and it becomes a DCT coefficient to be transmitted to the quantization section 210. In the quantization section 210, the DCT coefficient is quantized to be transmitted to the variable length coding section 211 as a quantized data. In the variable length  
20   coding section 211, the quantized data is transformed to a Huffman code. Incidentally, in case of the intra-coding mode, the difference value becomes the coded block data as it is, and, in case of the motion compensation prediction system, the difference value becomes a motion quantity information.

【 0 0 4 6 】

25       The DCT coefficient of the quantized frequency domain is restructured to the original difference value in the inverse quantization section 212 and in the inverse discrete cosine transformation section 213, and the restructured difference value is added to the previous picture from the frame memory 203 and is written in the frame memory 203 for the use of the coding the next picture.

【 0 0 4 7 】

The coding block data transformed to the Huffman code, the DCT coefficient, the motion quantity information, the coded block position information and the coding mode are multiplexed to be one data in the multiplexing section 216 to be  
 5 output. For example, in a multiplex data, as shown in FIG 4, the coded block position information 402 is arranged between a start code 401 and a header 403, and coding mode information 404, motion quantity information 405 and a coefficient of the cosine transformation 406 are arranged following the header 403, followed by coded block data 407.

10       【 0 0 4 8 】

The coding apparatus of the present invention surely transmits the first image, which is used as a reference image, by transmitting the same image at a plurality of times at the beginning of communication or the initial time of the transmission of an image by the use of the aforesaid picture counter. Thereby, the processing  
 15 of the flowing steps, i.e. the processing of updating the reference image by the difference from the reference image, is made to be sure. As a result, it is possible to make the deterioration of picture quality degradation on the image reception side reduce.

      【 0 0 4 9 】

20       Next, a transmission control by the picture counter will be described.

The coding controlling section 206 outputs quantization mode information for controlling the coding apparatus of the present invention to perform the intra-coding to the quantization section 210 when the counted value from the picture counter 205 is equal to or less than a predetermined value (N). In this case,  
 25 because the switch 207 is switched to the "0" side in conformity with an instruction from the coding controlling section 206, the quantization section 210 performs the quantization of the DCT coefficient about the intra-picture.

      【 0 0 5 0 】

Moreover, when the counted value of the picture counter 205 is larger than N,

the coding controlling section 206 outputs the coding mode information for controlling the coding apparatus to perform the coding in conformity with the motion compensation prediction system to the quantization section 210. In this case, because the switch 207 is switched to the frame memory 203 side in

5 conformity with the instruction from the coding controlling section 206, the quantization section 210 performs the quantization of a DCT coefficient about an inter-picture.

【 0 0 5 1 】

Moreover, the coding controlling section 206 outputs to the quantization  
10 section 210 a signal for controlling the coding apparatus so that the value of quantization parameter is large, namely the image is rough, when the counted value is equal to or less than  $(N - 1)$ , and that the value of the quantization parameter is small, namely the image is fine, when the counted value is  $N$ .

【 0 0 5 2 】

15 For example, in case of  $N$  is three, namely in the case where the number of times of the plural transmission is three, examples of the coding mode and the quantization parameter in each picture are shown in the following.

【 0 0 5 3 】

1st picture: Intra-coding mode, Quantization parameter = 31

20 2nd picture: Intra-coding mode, Quantization parameter = 31

3rd picture: Intra-coding mode, Quantization parameter = 8

4th picture and the following: Motion compensation prediction system quantization, Parameter is arbitrary.

(Smaller quantization parameters indicate finer images.)

25 【 0 0 5 4 】

The picture quality and the number of times of transmission of the image which are transmitted at a plurality of times can be determined under the consideration of the certainty of the transmission thereof and the data quantity thereof. In consideration of these points, it is preferable that the number of times

of transmission is three and only the final image is made to be fine.

【 0 0 5 5 】

When the difficulty of the occurrence of errors in the case where the number of times of transmission is three is calculated, the result becomes as follows. As the preconditions, the following conditions are supposed. Transmission error rate:  $1e-4$  (Error of one bit occurs at every 10,000 bits on an average), Code quantity of a fine picture quality: 16,000 bits, Code quantity of a rough picture quality: 6,400 bits.

【 0 0 5 6 】

10 When the first and the second pictures are coded roughly and the third picture is coded finely, the code quantity of each picture becomes the following. Code quantity of the first picture: 6,400 bits, Code quantity of the second picture: 6,400 bits, Code quantity of the third picture: 16,000 bits.

【 0 0 5 7 】

15 In this case, if the transmission error rate is  $1e-4$ , the probability of the occurrence of a transmission error in the first picture is  $6,400 \text{ bits} \times 1e-4 = 0.64$ . Moreover, if the number of the transmission units (the unit of the transmission in the case where a screen is divided into narrow strips) is nine, the probability that an error is generated in any one of the nine transmission units is  $6,400 \text{ bits} \times 1e-4 \times 1/9 = 0.07$  when nine transmission units have the same probability that an error is generated in each unit.

【 0 0 5 8 】

Similarly, as for the second picture, too, the probability is  $6,400 \text{ bits} \times 1e-4 \times 1/9 = 0.07$ . As for the third picture, because the code quantity thereof is 16,000 bits, the probability is  $16,000 \text{ bits} \times 1e-4 \times 1/9 = 0.18$ .

【 0 0 5 9 】

The probability that errors are generated in the same transmission unit among the nine transmission units at all of three times of transmission is  $0.07 \times 0.07 \times 0.18 = 0.008$ .



## 【 0 0 6 0 】

Because, in the conventional coding apparatus, only the first picture is the picture in conformity with the intra-coding mode and the second and following pictures are pictures in conformity with the motion compensation prediction system, the probability that the reference image becomes impossible to be used (the probability that a coded block cannot be decoded owing to a transmission error) is 0.18. Therefore, the embodiment of the present invention can decrease the probability that it becomes impossible to use the reference image by about 95 %.

## 【 0 0 6 1 】

Incidentally, as for the code quantity, the ratio of the intra-coding mode (Ia) code quantity (fine), the intra-coding mode (Ib) code quantity (rough) and the motion compensation prediction system (P) code quantity is about 7 : 3 : 1, the code quantities from the beginning of communication through the fourth 4 picture are the following in comparison with the prior art: I P P P = 7, 1, 1, 1 = 9 (in the prior art), Ib Ib Ia P = 3, 3, 7, 1 = 14 (in the present invention). Then, the increased quantity of the present invention is one and a half times.

## 【 0 0 6 2 】

Under the consideration of the increased code quantity and the probability that the first picture becomes impossible to be used like that, the number of times of transmission and the picture quality and so on can be determined. Because the generated code quantity depends on input images, these number of times of transmission and the picture quality are appropriately changed.

## 【 0 0 6 3 】

In the coding apparatus of the present invention, a plurality of pictures are coded in conformity with the intra-coding mode successively (N times) from the beginning of communication, and first (N - 1) pictures are transmitted in rough picture qualities, and further the last Nth picture is transmitted in a fine picture quality.

## 【 0 0 6 4 】

According to the present invention, the probability that a coded block at the same position becomes impossible to be correctly decoded even once can be decreased, and the propagation of the deterioration of picture quality is prevented, by transmitting an intra-picture (N - 1) times successively. Consequently, even if a transmission error is generated in the first picture and a coded block that could not correctly be decoded exists, because the next picture is transmitted after the intra-coding thereof, it becomes possible to recover the coded block from being deteriorated in its picture quality unless the coded block at the same position in the next picture can correctly be decoded owing to a transmission error.

## 【 0 0 6 5 】

In this case, because the intra-picture has a code quantity larger than that of the inter-picture in conformity with the motion compensation prediction coding system, the coding apparatus of the embodiment takes a lot of time necessary for the transmission from the side of transmission to the side of reception. Accordingly the coding apparatus suppresses the code quantity by transmitting the first (N-1) pictures in rough picture quality for shortening the transmission time. Moreover, it becomes possible to decrease the probability that a transmission error is generated in the (N - 1) pictures by making the picture qualities of the (N - 1) pictures rough to decrease the code quantity.

## 【 0 0 6 6 】

## (Embodiment 2)

FIG 3 is a block diagram showing the configuration of a decoding apparatus corresponding to the coding apparatus according to the embodiment 1.

In FIG 3, a received signal is transmitted to a separation section 301 to be separated there to a Huffman code of a DCT coefficient, a Huffman code of motion quantity information, coded block position information, and coding mode information. The separated codes and information are transmitted to

respective processing sections. To put it concretely, the DCT coefficient is transmitted to a variable length decoding section 302; the motion quantity information is transmitted to a variable length decoding section 305; the coded block position information is transmitted to a frame memory 307 and a decoding error memory 310; and the coding mode information is transmitted to an intra-transmission requirement judging section 309.

【 0 0 6 7 】

The DCT coefficient that was coded by the variable length decoding section 302 is transmitted to an inverse quantization section 303 to be quantized inversely. The DCT coefficient which was quantized inversely is transmitted to an inverse discrete cosine transformation section 304, and is used for the inverse discrete cosine transformation there.

【 0 0 6 8 】

The motion quantity information that was decoded by the variable length decoding section 305 is transmitted to a memory controlling section 306. The memory controlling section 306 controls a picture output from the frame memory 307. Incidentally, when a decoding error is generated in the variable length decoding sections 302, 305, a decoding error signal is transmitted to the decoding error memory 310.

20      【 0 0 6 9 】

The intra-transmission requirement judging section 309 judges whether an intra-transmission requirement is necessary or not on the basis of whether the picture in which a decoding error was generated is an intra-picture or not, namely whether a coded block that was not correctly decoded even once in conformity with the intra-coding mode exists or not, and transmits an intra-transmission requirement signal to a communication companion.

【 0 0 7 0 】

In the decoding apparatus, the position of a coded block that could not correctly decoded owing to a transmission error among intra-pictures received

from the beginning of communication is memorized in the memory. In the case where a coded block that could not correctly decoded in conformity with the intra-coding mode when an inter-picture is first received from the beginning of the communication, the decoding apparatus is controlled to output an intra-  
 5 picture transmission requirement to the transmission side. To put it concretely, the decoding apparatus judges whether a coded block that could not be decoded correctly exists or not by reference to the memory at the time of detecting an inter-picture first, and judges whether the decoding apparatus outputs an intra-picture transmission requirement to the transmission side.

10           【 0 0 7 1 】

This is due to the following reason. That is, in the case where the coded block that could not correctly decoded in conformity with the intra-coding mode even once at the time of the reception of an inter-picture, no image data is written in the coding block. Consequently, the picture quality of the coded block is  
 15 remarkably deteriorated. When the inter-picture is received in spite of the existence of such a coded block, the deterioration of the picture quality is propagated and unseemly images are kept on being output.

          【 0 0 7 2 】

Accordingly, the position of a coded block that could not correctly decoded  
 20 from the beginning of communication in conformity with the intra-coding mode even once is stored. And if the coded block that could not correctly be decoded in conformity with the inter-coding mode even once exists when the first inter-picture is received after the beginning of the communication, the decoding apparatus does not decode the inter-picture, and requires an intra-picture to the  
 25 transmission side. Thereby, an intra-picture having no coded block that could not correctly be decoded in conformity with the intra-coding mode can be obtained, and then the reference to the coded block that could not be decoded in conformity with the intra-coding mode even once by the inter-picture is obviated. Thereby, the time-wise propagation of the remarkable deterioration of picture

quality can be avoided.

【 0 0 7 3 】

Next, the operations of the decoding apparatus having the aforesaid configuration will be described.

5 First, the data transmitted from the transmission side is separated to a Huffman code of a DCT coefficient, a Huffman code of motion quantity information, coded block position information and a coding mode information by the separation section 301.

【 0 0 7 4 】

10 The Huffman code of the DCT coefficient is decoded to a DCT coefficient after quantization by the variable length decoding section 302, and is inversely quantized to the DCT coefficient by the inverse quantization section 303. The DCT coefficient which was inversely quantized is transmitted to the inverse discrete cosine transformation section 304, and is used for the inverse discrete  
15 cosine transformation there, and then an image data is obtained.

【 0 0 7 5 】

The Huffman code of the motion quantity information, too, is similarly decoded to the motion quantity information by the variable length decoding section 305, and is transmitted to the memory controlling section 306. The  
20 memory controlling section 306 calculates an address for reading image data from the frame memory 307 on the basis of the motion quantity information.

【 0 0 7 6 】

An output of the frame memory 307 and image data after the inverse discrete cosine transformation are added to each other by the adder 308, and a  
25 reproduced image is reproduced. The reproduced image is output and memorized in the frame memory 307 to be used for the decoding of the next picture.

【 0 0 7 7 】

The variable length decoding sections 302, 305 severally output a decoding

error signal when they detect a code that does not exist as a variable length code owing to a transmission error during decoding. The decoding error memory 310 memorizes the coded block that could not correctly be decoded at every coded block.

5           【 0 0 7 8 】

The decoding error memory 310 is initialized at a value which is not zero and one, and the value zero is written in the memory 310 to a coded block that was correctly decoded, and the value of one is written in the memory 310 to a coded block in which a decoding error occurred. To a coded block that was once  
10 written as zero, the decoding error memory 310 is controlled so as not to write one in it even if a decoding error is generated in the coded block. That is, when a decoding error is generated, the error state of the coded block is read out from the decoding error memory 310. If the error state is zero, the contents of the decoding error memory 310 are not updated. If the error state is the initial value,  
15 value one is written in, and if the error state is one, the error state is left as it is.

          【 0 0 7 9 】

By such controlling, it becomes possible that a coded block that could correctly be decoded even once in conformity with the intra-coding mode is not memorized in the decoding error memory 310 even if the coded block cannot  
20 correctly be decoded after that.

          【 0 0 8 0 】

The intra-transmission requirement judging section 309 receives the separated coding mode information, and refers to the decoding error memory 310 when the section 309 receives a first inter-picture after the beginning of  
25 reception. When a coded block that could not correctly decoded even once exist in the decoding error memory 310 even if the coding mode is the intra-coding mode, the section 309 outputs an intra-transmission requirement signal to the transmission side (the side of the communication companion).

          【 0 0 8 1 】

Incidentally, if a concealing processing function is provided on the decoding side, because a pre-coded picture for performing the concealing processing already exists and the probability that a coded block at the same position cannot correctly decoded for (N - 1) times successively is very low even if a transmission error is generated at the time of receiving the Nth picture, the avoidance of the remarkable deterioration of picture quality becomes possible.

【 0 0 8 2 】

By the execution of such control, an intra-picture that has no coded block that could not correctly decoded in conformity with the intra-coding mode even once can be obtained, the reference to the coded block that could not correctly be decoded in conformity with the intra-coding mode even once by the inter-picture is obviated, and thereby the time-wise propagation of the remarkable deterioration of picture quality can be avoided.

【 0 0 8 3 】

The interactive image communication becomes possible by the configuration providing the aforesaid coding apparatus and the decoding apparatus of the present invention and by the use of the configuration on both of the transmission side and the reception side.

【 0 0 8 4 】

Incidentally, although the time-varying image coding/decoding according to the aforesaid embodiments 1, 2 are described as the time-varying image coding apparatus/the time-varying image decoding apparatus, these time-varying image coding/decoding may be configured as software. For example, the coding apparatus and the decoding apparatus may be configured so that time-varying image coding/decoding programs are stored in a ROM and the time-varying image coding/decoding are executed in conformity with the program by instructions of CPU. Moreover, the software may be read out from a medium storing the software, and the time-varying image coding/decoding may be executed by a computer. In such a case, too, the same operations and effects as

those in the embodiments 1, 2 are developed.

【 0 0 8 5 】

Although a case using radio transmission lines that is easy to generate an error during transmission is described, the present invention may also be applied  
5 to a case using wire transmission lines. The present invention especially develops its effects in radio image communication terminals.

【 0 0 8 6 】

#### [EFFECT OF THE INVENTION]

As described above, according to the present invention, the probability that a  
10 coded block at the same position becomes impossible to be correctly decoded in conformity with the intra-coding mode even once can be suppressed to be low, and the time-wise propagation of the remarkable deterioration of picture quality is obviated. Consequently, it becomes possible to provide an image easy to see even if image transmission using transmission lines on which transmission errors  
15 are generated is performed.

【 0 0 8 7 】

Moreover, in the case where there are coded blocks at the same position that could not correctly be decoded in conformity with the intra-coding mode even once, the present invention does not perform the decoding of an inter-picture.  
20 Consequently, the remarkable deterioration of picture quality is avoided and the time-wise propagation of the deterioration is obviated. Thereby an image easy to see can be provided.

#### [BRIEF DESCRIPTION OF DRAWINGS]

[FIG 1]

25 A block diagram showing the configuration of a radio communication apparatus equipped with a coding apparatus according to an embodiment of the present invention;

[FIG 2]

A block diagram showing the configuration of the coding apparatus according



to the embodiment of the present invention;

[FIG 3]

A block diagram showing the configuration of a decoding apparatus  
corresponding to the coding apparatus according to the embodiment of the  
5 present invention;

[FIG 4]

A frame configuration diagram of a signal to be used in the radio  
communication apparatus equipped with the coding apparatus of the present  
invention.

10 »[EXPLANATIONS OF LETTERS OR NUMERALS]

201 Raster / Coded Block Transformation Information

202 Motion Detection Section

203, 307 Frame Memory

204, 306 Memory Controlling Section

15 205 Picture Counter

206 Coding Control section

207 Switch

208 Subtractor

209 Discrete Cosine Transformation Section

20 210 Quantization Section

211 Variable Length Coding Section

212 Inverse Quantization Section

213 Inverse Discrete Cosine Transformation Section

214, 308 Adder

25 215 Variable Length Coding Section

216 Multiplexing Section

301 Separation Section

302 Variable Length Decoding Section

303 Inverse Quantization Section

- 304 Inverse Discrete Cosine Transformation Section
- 305 Variable Length Decoding Section
- 309 Intra-transmission Requirement Judging Section
- 310 Decoding Error Memory

5

10 «

15

20

25

[NAME OF DOCUMENT] ABSTRACT

[ABSTRACT]

[OBJECT] To suppress the remarkable picture quality deterioration at the time of the beginning of communication.

5 [OVERCOMING MEANS] A picture counter 205 counts and outputs the number of pictures input from the beginning of communication. A coding controlling section 206 outputs coding mode information for controlling a coding apparatus to perform intra-coding when a counted value of the picture counter 205 is equal to or less than a predetermined value (N), and outputs coding mode  
10 information for motion compensation prediction system when the counted value is more than N. Moreover, when the counted value is equal to and less than (N-1), the coding controlling section 206 outputs a signal for controlling a quantization section 210 to make the value of a quantization parameter large to the quantization section 210, and when the counted value is N, the coding  
15 controlling section 206 outputs a signal for controlling the quantization section 210 to make the quantization parameter small to the quantization section 210. A switch 207 is switched to "0" in case of the intra-coding and is switched to a frame memory 203 in case of the compensation prediction system in conformity with a signal of the coding controlling section 206.

20 [SELECTED DRAWINGS] FIG 2

